



Republic of the Philippines  
SOCIAL SECURITY SYSTEM  
East Avenue, Diliman, Quezon City

REQUEST FOR QUOTATION

2020-0035

SEALED CANVASS

February 12, 2020  
Date

PHILGEPS REF. NO.: 686-2587  
DATE POSTED : 2-13-20  
POSTED BY : ERIKA

Sir / Madam:

Please furnish us with your quotation on or before **February 18, 2020 @ 5:00PM** the following items:

No.	Quantity	PARTICULARS	Unit Cost	Total Cost
1	2 Pieces	Powered Speaker, 1000 watts Brand Name: _____ Model: _____ ABC = P 25,000.00 / Piece	P _____ / Piece	P _____
2	2 Pieces	Powered Speaker, 2000 watts Brand Name: _____ Model: _____ ABC = P 75,000.00 / Piece	P _____ / Piece	P _____
3	2 Pieces	Powered Subwoofer, 1600W Brand Name: _____ Model: _____ ABC = P 78,000.00 / Piece	P _____ / Piece	P _____
4	4 Pieces	Speaker Brand Name: _____ Model: _____ ABC = P 6,000.00 / Piece	P _____ / Piece	P _____
5	3 Pieces	Microphone Stand Brand Name: _____ Model: _____ ABC = P 4,500.00 / Piece	P _____ / Piece	P _____
<p><b>(Please see attached Sample Images &amp; Technical Specification)</b></p> <p>FOR : BET – EFMD</p> <p>GRAND TOTAL ABC = P 393,500.00 EFMD – Memo, PR # 1024-20 received by PPMD dated 2-7-2020 with Request # 2020-0079 [APP FY 2020, Original - #183 Powered Speaker (4) &amp; Powered Subwoofer (2); #207 Speaker (4); #208 Stand – Microphone (3)]</p>				

**Delivery Terms: Thirty (30) Calendar Days upon receipt of approved P.O.**

**Payment Terms: Government Terms (Payment is upon delivery of items / services & submission of billing documents.)**

**Price validity : Three (3) Months.**

- NOTE/S:**
- 1.) **For canvass with an ABC of P 100,000.00 and above**, the winning bidder is required to post a Performance Bond from receipt of Notice of Award equivalent to 5% Cash (Goods & Consulting Services) & 10% Cash (Infrastructure), Cashier's / Manager's Check, Bank Guarantee / Draft or 30% Surety Bond callable upon demand, of the contract price.
  - 2.) **Supplier is required to indicate his PhilGeps Registration Number on the canvass form.**
  - 3.) SSS shall withhold the applicable taxes from the amount payable in accordance with the BIR regulations.
  - 4.) **Please specify brand name / model offered.**
  - 5.) **Quantity is subject to change but not to exceed of the approved P.O.**
  - 6.) **Alternative offer is not allowed.**
  - 7.) **For technical query, please call Mr. Jojo Naval / EFMD @ 920-6401 local 5524.**

This is to certify that my Company is updated in the payment of contributions and loans to SSS, and conformed with the above terms & conditions, and the data / quotation indicated are valid.

\_\_\_\_\_  
Owner/Company Representative  
(Sign over Printed Name)

Reminder : Price quotation should be made with extra care taking into account the specification and unit of quantity to avoid errors. The offeror binds himself to this quotation.

**Please indicate below your Business Name, Address and Telephone Number and Date Received.**

Your Business SSS No. \_\_\_\_\_

PhilGeps Registration No. \_\_\_\_\_

T I N no. \_\_\_\_\_

Date Received : \_\_\_\_\_

\_\_\_\_\_  
(Business Name)

\_\_\_\_\_  
(Address & Telephone No.)

\_\_\_\_\_  
(E-mail Address)

Very Truly Yours,

HYDEE R. RAQUID

Department Manager III

Procurement, Planning & Management Department

Tel No. 920-6401 loc 5504-5507

Fax No. 435-9861


E-mail Address: bansilea@sss.gov.ph; pmd@sss.gov.ph



## Powered Speaker 1000W

Powered	YES
Power Configuration	Bi-amped
LF Driver Size	1 x 15"
HF Driver Size	1.35"
LF Driver Power Amp	700W
HF Driver Power Amp	300W
Total Power	1000W
Inputs	2 x XLR / TRS Combo
Output	1 x XLR
Frequency Range	45Hz – 20kHz
Crossover Frequency	2.2kHz
Enclosure Material	Molded Plastic
Mounting Options	Pole mount w/ 1.37" socket
Dimension (HxWxD)	28.1" x 16.8" x 12.3"
Weight	38.9 lbs

*b*

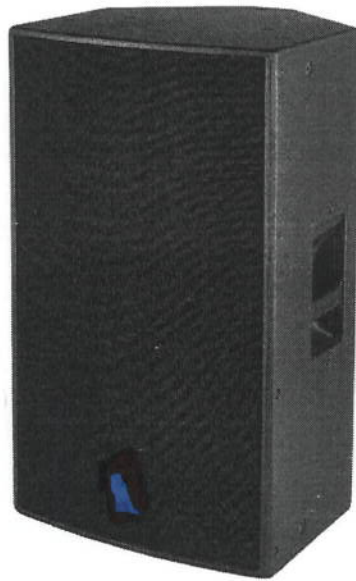


## Powered Speaker

Configuration	Active 2-Way
Enclosure Type	Bass-Reflex Loudspeaker
Total Power Capacity	2000 W Peak / 950 W RMS
Low Frequency	1000 W Peak / 850 W RMS
High Frequency	1000 W Peak / 100 W RMS
Amplifier Class	Class – D
HF Driver	1 x Rotatable Horn Titanium Compression Driver w/ 1" / 25.4 mm Throat
HF Voice Coil	2" / 50.8 mm / Neodymium Magnet
LF Driver	1 x 15" / 381 mm Woofer
LF Voice Coil	3" / 76.2 mm / Neodymium Magnet
Frequency Range	34 Hz to 20 kHz – 10dB
Maximum SPL	139 dB
Audio I/O	2 x Combo XLR – ¼" Input 2 x XLR Output
USB	1 x USB Type-A (External Memory, Host Connection)
Crossover	1.7 kHz


Max Sample Rate / Resolution	96 kHz
AC Input Power	100 to 240 VAC
AC Power Connector	1 x IEC (Locking)
Mounting	2 x 1.4" / 35mm Pole Socket (Dual Angle, Bottom)
Handles	1 x Each Side
Cooling	Fan (Variable Speed)
Construction Material	Plywood

6

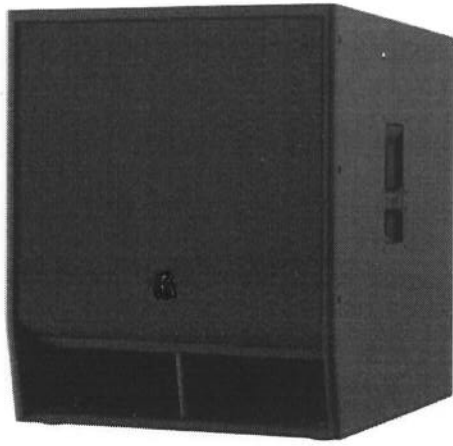

## Powered SubWoofer

Configuration	Active Subwoofer
Enclosure Type	Bass-Reflex Subwoofer
Total Power Capacity	1600 W Peak / 1200 W RMS
Amplifier Class	Class – D
LF Driver	1 x 18" / 457.2 mm Woofer
LF Voice Coil	4" / 101.6 mm / Ferrite Magnet
Frequency Range	30 Hz to 150 Hz – 10dB
Maximum SPL	136 dB
Audio I/O	2 x Combo XLR – ¼" Input 2 x XLR Output
USB	1 x USB Type-A (External Memory, Host Connection)
Max Sample Rate / Resolution	96 kHz
AC Input Power	100 to 240 VAC
AC Power Connector	1 x IEC (Locking)
Mounting	1 x 1.4" / 35mm Pole Socket (Top)
Handles	1 x Each Side
Cooling	Fan (Variable Speed)
Construction Material	Plywood

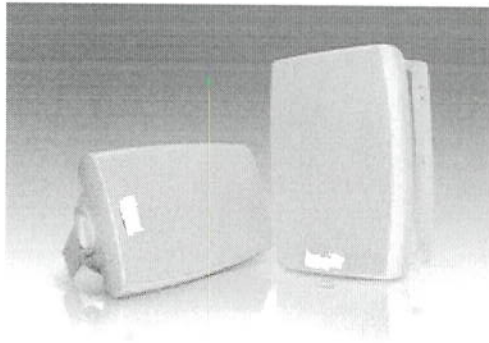

### Speaker

- 2 way outdoor speaker
- 70v 5 / 10 / 20 / 40w
- 150 watts
- 8 ohms
- absolute phase crossover
- titanium dome tweeter
- weather resistance design
- 6.5" woofer

6



### Microphone Stand Package

- Tripod Stand
- Black powder-coat finish with boom arm
- Includes microphone and 6m XLR to XLR microphone cable
- Includes bag and accessories

8