



**Republic of the Philippines
SOCIAL SECURITY SYSTEM
East Avenue, Diliman, Quezon City**

REQUEST FOR QUOTATION

2020-0097

SEALED CANVASS

June 25, 2020
Date

PHILGEPS REF. NO.: 7075045
DATE POSTED : 06-29-20
POSTED BY : ERIKA

Sir / Madam :

Please furnish us with your quotation on or before **JULY 3, 2020 @ 5:00PM** for the following items:

No.	Quantity	PARTICULARS	Unit Cost	Total Cost
1	1 Lot	<p>Supply of materials & labor for the Structured Cabling for SSS Bontoc Branch Office Expansion, located at G/F & 2/F A. Kiat-Ong Bldg., Loc-Ong St., Poblacion, Bontoc</p> <p><i>(Please see attached Scope Of Works, Plan Lay-out & Bill Of Quantities)</i></p> <p>GRAND TOTAL ABC = P 274,222.99 / Lot</p> <p>NCD – Memo received by PPMD dated 6-23-2020 with Request # 2020-0204 [FY 2020 APP (Original) – MR Bldg - Repairs & Others - POOL - Specialty Works and Others) under APP/PAP Code # 350]</p>		P _____ per Lot

Delivery Terms: Thirty Five (35) calendar days upon receipt of Approved PO / JO.

Payment Terms : Government Terms (Payment is upon delivery of items / services and submission of billing documents.)

Price validity : Three (3) Months

- NOTE/S:**
- 1.) For canvass with an ABC of P 100,000.00 and above,** the winning bidder is required to post a Performance Bond from receipt of Notice of Award equivalent to 5% Cash (Goods & Consulting Services) & 10% Cash (Infrastructure), Cashier's / Manager's Check, Bank Guarantee / Draft or 30% Surety Bond callable upon demand, of the contract price.
 - 2.) Supplier is required to indicate his PhilGeps Registration Number on the canvass form.**
 - 3.) SSS shall withhold the applicable taxes from the amount payable in accordance with the BIR regulations.**
 - 4.) Alternative offer is not allowed.**
 - 5.) Quantity is subject to change but not to exceed the quantity in the approved P.O.**
 - 6.) For clarification of details, please contact Mr. Eduardo De Leon or Mr. Moris Crystal @ (8) 920-6401 local 5648.**

This is to certify that my Company is updated in the payment of contributions and loans to SSS, and conformed with the above terms & conditions, and the data / quotation indicated are valid.

Owner/Company Representative
(Sign over Printed Name)

Reminder : Price quotation should be made with extra care taking into account the specification and unit of quantity to avoid errors. The offeror binds himself to this quotation.

Please indicate below your Business Name, Address and Telephone Number and Date Received.

Your Business SSS No. _____

PhilGeps Registration No. _____

T I N no. _____

Date Received : _____

(Business Name)

(Address & Telephone No.)

(E-mail Address)

Very Truly Yours,

Hydee B. Raquid
HYDEE B. RAQUID

Department Manager III

Procurement, Planning & Management Department

Tel No. 920-6401 loc 5504-5507

Fax No. 435-9861

E-mail Address: bansilea@sss.gov.ph; pmd@sss.gov.ph

/ rcd /

Project Proponent: Network and Communications Department

Project Title/Description : Proposed structured cabling forSSS Bontoc branch Expansion

NO.	Cabling Components	QUANTITY	UNIT	COST/UNIT	TOTAL COST
1	Cat 5e Information Outlet	64	Pieces		-
2	Cat 5e Patch Panel 24 ports	5	Piece		-
3	Cable Manager	3	Pieces		-
4	Modular Faceplate 2-port	31	Pieces		-
5	Modular Faceplate 1-port	2	Pieces		-
6	Cat5e patch cord 3 meters	33	Pieces		-
7	Cat 5E UTP Cable 4-pair solid, 24AWG	9	Spool (305)		-
8	IDF (Network Cabinet) 800mm. W x 800mm. D x 1000mm. H, Power Strip, 8 pcs. 3-prong, 220V C.O. , 2 pcs Exhaust. Fan on Top Frame	1	Lot		-
TOTAL					-

NO.	Roughing- Ins	QUANTITY	UNIT	COST/UNIT	TOTAL COST
1	Cable raceway enamel coated, Metal flexible tube, PVC's, junction/square/pull box, Plastic Box, angle bar, anchor bolt,PVC pipe, Service cap, etc.)	1	Lot		-
2	Miscellaneous	1	Lot		-
TOTAL					-

NO.	Others	QUANTITY	UNIT	COST/UNIT	TOTAL COST
1	Labor and Mark-up	1	Lot		-
2	Mobilization	1	Lot		-
3	Others (freight, accommodation etc.	1	Lot		-
4	VAT	1	Lot		-
TOTAL					-




GRAND TOTAL					-
--------------------	--	--	--	--	---



PREPARED BY _____
 SIGNATURE _____
 NAME OF REPRESENTATIVE: _____
 DESIGNATION _____
 NAME OF COMPANY _____

GENERAL NOTES/SCOPE OF WORKS:

1. SUPPLY NECESSARY MATERIALS, MANPOWER, TOOLS AND TECHNICAL PERSONNEL FOR THE FULL IMPLEMENTATION OF THE PROJECT
2. ROUGHING -INS INSTALLED OVER THE CEILING SHALL BE CABLE RACEWAY (2" X 4") ON DISTRIBUTION PVC, MAY BE USED
3. SUPPLY OF NETWORK CABINET (800MM X 800MM X 1000 MM) WITH POWER STRIP, 8 PCS. 3-PRONGE, 220V C.O.
4. SUPPLY AND CABLE PULLING OF CAT5E SOLID UTP CABLES FOR 28 VOICE, 30 DATA, FROM NETWORK CABINET TO HORIZONTAL DISTRIBUTIONS.
5. PROVISION OF 4 RUNS OF CAT5E UTP (SOLID) CABLE EMBEDDED IN 1 INCH CONDUIT GOING TO MDF/DEREGATION AREA (NOT LIMITED TO A SINGLE TELCO, PROVIDER)
6. PROVISION OF 2 INCH DIAMETER CONDUIT FROM NETWORK CABINET GOING TO BLDG. MAIN DISTRIBUTION FRAME /DERMARCATION AREA/CABLE ENTRANCE FACILITY
7. WHENEVER NECESSARY PROVIDE PULL BOX OF PROPER SIZE AND DIMENSION ALTHOUGH NOT INDICATED IN THE PLAN
8. SUPPLY OF CAT5E PATCH PANELS:
 DATA/VOICE 4 PCS
 TELCO, SOURCE 1 PC.
9. ANY OTHER MATERIALS NECESSARY TO COMPLETE THE PROJECT SHALL BE IN THE ACCOUNTABILITIES OF THE CONTRACTOR WITHOUT COST TO SSS
10. TAGGING, TERMINATION, TESTING, AND COMMISSIONING OF ALL DATA AND VOICE OUTLETS
11. TURNOVER AND SUBMISSION OF AS-BUILT PLAN AND DOCUMENTATION.

SYMBOLS AND LEGEND:


 <p>SOCIAL SECURITY SYSTEM</p>	<p>PROJECT TITLE: PROPOSED STRUCTURED CABLING FOR SSS BONTOC BRANCH OFFICE EXPANSION</p>	<p>NOTED BY: LEO CALIXTO C. ABAYON DM III - NCD</p>	<p>NETWORK AND COMMUNICATIONS DEPARTMENT REVIEWED BY:  NOEL M. BEÑAL SSO IV - NCD PREPARED BY:  MOÑIS ALER C. CRYSTAL SMT II - NCD</p>
<p>NETWORK & COMMUNICATIONS DEPARTMENT</p>	<p>LOCATION: G/F & 2/F A, Kata-Ong Bldg., Loc-Ong St., Polibacion, Bontoc</p>		

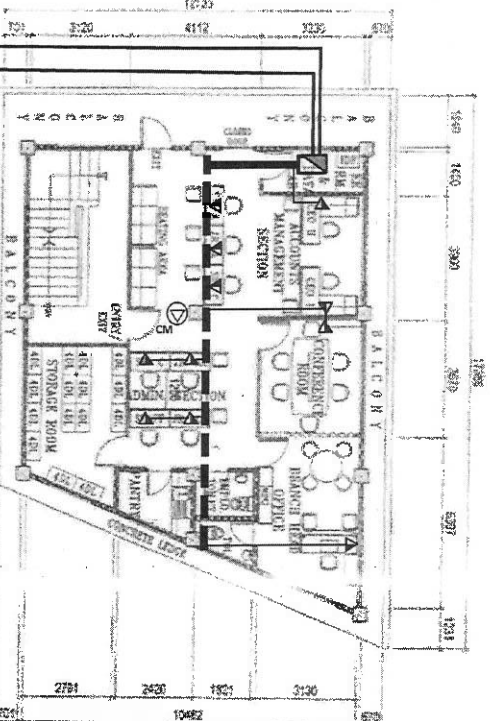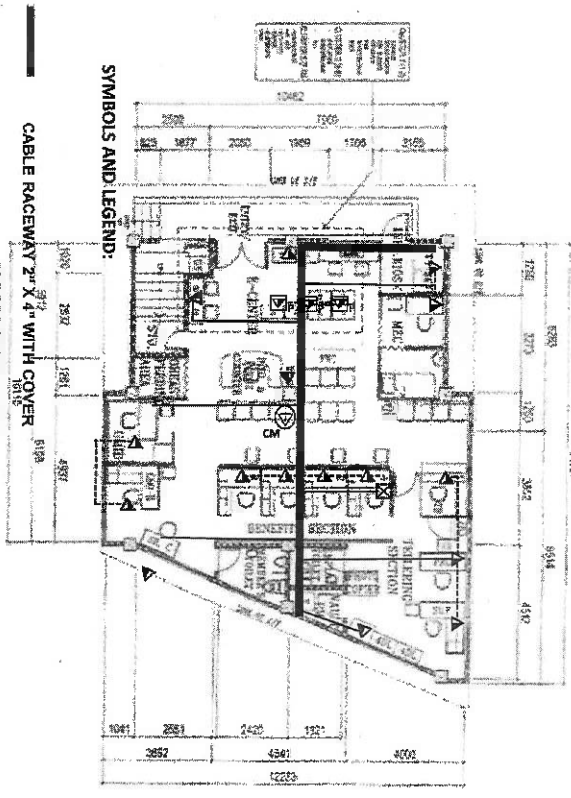


- SYMBOLS AND LEGEND:**
- CABLE RACEWAY 2" X 4" WITH COVER
 - ☒ PULLBOX / SQUARE BOX-POSED GROUND FLOOR LAYOUT
 - ▼ CAT5e DATA & VOICE OUTLET W/ FACE PLATE
 - ▽ BIOMETRICS 1.2M ABOVE FINISHED FLOORING
 - CONDUIT
 - ▣ NETWORK CABINET
 - ⊙ DATA OUTLET W/ FACE PLATE (CEILING MOUNTED)
 - ⊙ POP-UP DATA/VOICE OUTLET W/ FACE PLATE

- 4 RUNS OF CAT5E UTP (SOLID) CABLE EMBEDDED IN 1 INCH CONDUIT GOING TO CABLE ENTRANCE FACILITY/ DEMARCATION /MDF
- 2" CONDUIT W/ GUIDE WIRE & SERVICE CAP GOING TO CABLE ENTRANCE FACILITY/ DEMARCATION

	PROJECT TITLE:	NOTED BY:	NETWORK AND COMMUNICATIONS DEPARTMENT
	PROPOSED STRUCTURED CABLING FOR SSS BONTOC BRANCH OFFICE EXPANSION	 NOEL M. BERR, I. SSTV-NO	
NETWORK & COMMUNICATIONS DEPARTMENT	LOCATION: 6/F & 2/F A, Kant-Ong Bldg., Lac-ONG St., Poblacion, Bontoc	 LEO CALIXTO C. ABAYON DM III-NO	PREPARED BY: MOYR ALBERT C. CRYSTAL DM III-NO

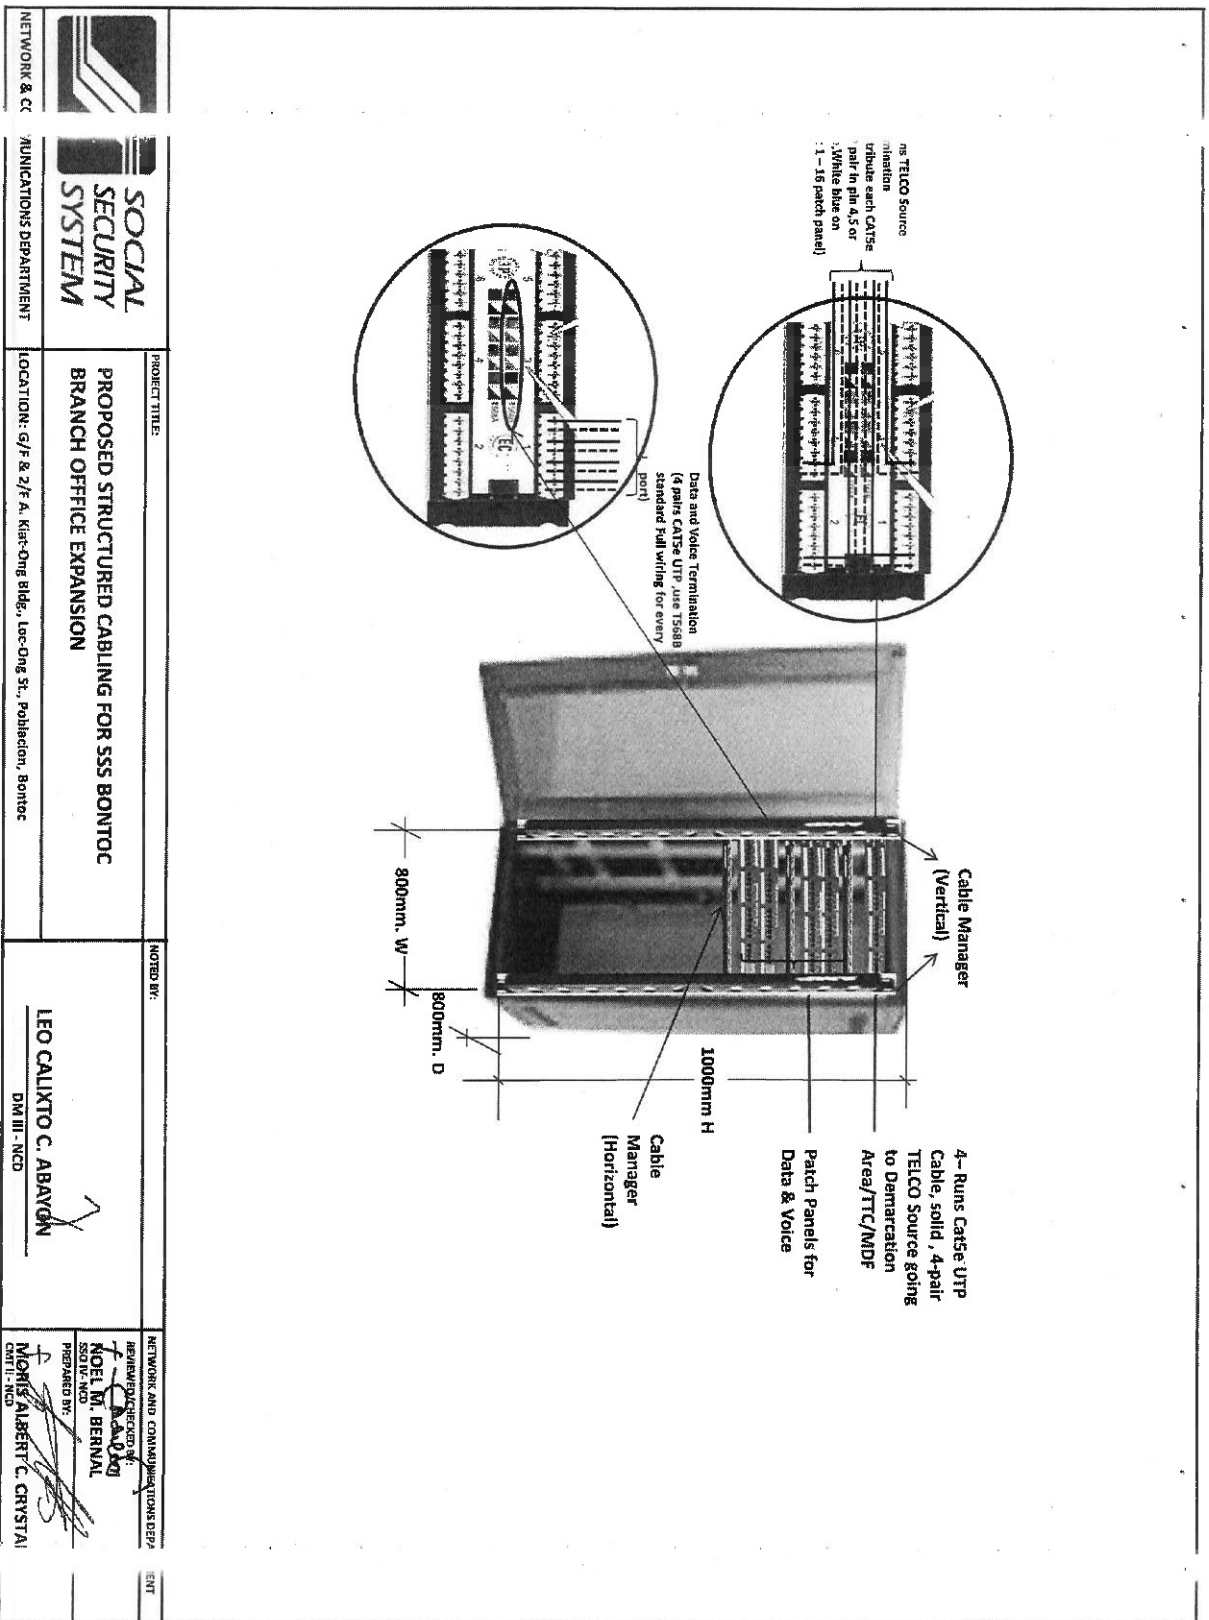

 <p>SOCIAL SECURITY SYSTEM</p>	<p>PROJECT TITLE: PROPOSED STRUCTURED CABLING FOR SSS BONTOC BRANCH OFFICE EXPANSION</p>	<p>NOTED BY: LEO CALIXTO C. ABAYON DM III - NCD</p>	<p>NETWORK AND COMMUNICATIONS DEPT. PREPARED BY: NOEL M. BERNAL SOLV - NCD MONTE ALBERT C. CRYSTAL CNTL - NCD</p>
<p>NETWORK & COMMUNICATIONS DEPARTMENT</p>	<p>LOCATION: G/F & 2/F A. Kian-Ding Bldg., Lac-Ding St., Polibacion, Bontoc</p>		