



Republic of the Philippines
SOCIAL SECURITY SYSTEM
 East Avenue, Dilliman, Quezon City

REQUEST FOR QUOTATION

2020-0119

PHILGEPs REF. NO.: 7141714
 DATE POSTED : 07-28-20
 POSTED BY : FRIKA

July 27, 2020
 Date

Sir / Madam :

Please furnish us with your quotation on or before **August 3, 2020 @ 5:00PM** for the following items:

No.	Quantity	PARTICULARS	Unit Cost	Total Cost
	1 Lot	Supply of Materials & Labor for the (Roughing Ins For MPLS) Entrance Facility for Telco of SSS San Jose Branch, Located at NE Bodega, Brgy. Abar 2nd, San Jose City, Nueva Ecija <i>(Please see attached Scope of Works, Plan Lay-out & Bill of Quantities)</i> TOTAL ABC: P 75,386.64 / Lot 2020 APP No. 338 – IT Operations - Network Entrance Facility for Telco - Pool NCD memo dated 07/24/2020, received by PPMD thru email on 07/24/2020 with Request No. 2020-0218 (1st Re-canvass of 2020-0109 dated 07/16/2020 with original memo request received on 07/15/2020)		

Delivery Terms: Thirty-five (35) Calendar Days upon receipt of approved Job Order

Payment Terms: Government Terms (Payment is upon delivery of items/services and submission of billing documents)

Price validity : Three (3) Months

- NOTE/S:**
- 1.) For canvass with an ABC of P 100,000.00 and above, the winning bidder is required to post a Performance Bond from receipt of Notice of Award equivalent to 5% Cash (Goods & Consulting Services) & 10% Cash (Infrastructure), Cashier's / Manager's Check, Bank Guarantee / Draft or 30% Surety Bond callable upon demand, of the contract price.
 - 2.) Supplier is required to indicate his PhilGeps Registration Number on the canvass form.
 - 3.) SSS shall withhold the applicable taxes from the amount payable in accordance with the BIR regulations.
 - 4.) Alternative offer is not allowed.
 - 5.) Quantity is subject to change but not to exceed the quantity in the approved Job Order
 - 6.) For further clarification of details, please contact Mr. Eduardo De Leon / Mr. Moris Crystal at 8920-6401 local 5655/5648 or send an e-mail to deleonev@sss.gov.ph / crystalmc@sss.gov.ph

This is to certify that my Company is updated in the payment of contributions and loans to SSS, and conformed with the above terms & conditions, and the data / quotation indicated are valid.

 Owner/Company Representative
 (Sign over Printed Name)

Reminder : Price quotation should be made with extra care taking into account the specification and unit of quantity to avoid errors. The offeror binds himself to this quotation.

Please indicate below your Business Name, Address and Telephone Number and Date Received.

Your Business SSS No. _____

PhilGeps Registration No. _____

T I N no. _____

Date Received : _____

 (Business Name)

 (Address & Telephone No.)

 (E-mail Address)

Very Truly Yours,

Hydee R. Raquid
 HYDEE R. RAQUID

Department Manager III⁹

Procurement, Planning & Management Department

Tel No. 920-6401 loc 5504-5507

Fax No. 435-9861


E-mail Address: bansilea@sss.gov.ph; pmd@sss.gov.ph

Project Proponent: Network and Communications Department
Project Title/Description : Roughing-ins for MPLS/ Telco Entrance Facility for SSS San Jose, Nueva Ecija Branch (NE Bodega, Brgy. Abar 2nd, San Jose City, Nueva Ecija)
SCOPE OF WORKS
<ul style="list-style-type: none"> Supply necessary materials, manpower, tools and technical personnel for the Installation of roughing-ins/ Telco Entrance Facility from SSS Baler Network Cabinet to PLDT Demarcation Area (approximately 66 meters). Installation of 2 in. conduit from PLDT Demarcation area (Concrete Pedestal near the highway) to SSS Network Cabinet at Electrical Room Roughing –ins installed outside the building (exposed) shall be Rigid Steel/ IMC others PVC may be used. Roughing-ins should be installed with proper support (pre-fabricated or special fabrication if necessary) 200 mm . L x 200 mm. W. x 150 mm. H. pull box shall be installed for every bend or as needed though not indicated in the plan. Provision of 14 in. L x 14 in W. x 20 in. H concrete Pedestal to embed the end pull box near the Highway. Chipping and restoration to embed conduit going to the building approximately 55 meters. Turnover and Submission of pictures showing completed project All other materials necessary for the completion of the project shall be in the account of the contractor without cost to SSS
OTHER CONDITIONS FOR CABLING CONTRACTORS/SUPPLIERS/INSTALLER
<ul style="list-style-type: none"> Any damages incurred during the implementation of the project shall be in the account of the contractor and should be restored to its original appearance without cost to SSS or building owner. Bidders should have no pending/incomplete project from SSS within six (6) months from submission of proposal.

Prepared by :


Moris Albert C. Crystal
CMT II, NCD

Noted by:


Eduardo V. De Leon
Acting SSO IV, NCD

Project Proponent: Network and Communications Department					
Project Title/Description : Roughing-ins for MPLS/ Telco Entrance Facility for SSS San Jose, Nueva Ecija (NE Bodega, Brgy. Abar 2nd, San Jose City, Nueva Ecija)					
NO.	Cabling Components	QUANTITY	UNIT	COST/UNIT	TOTAL COST
1	2 in. diameter Rigid Steel Conduit/ IMC	7	Length		
2	2 in. diameter Rigid Steel Conduit/ IMC	15	Length		
3	3/4 in. diameter Metal Flexible Conduit	3	meters		
4	Pull box/Pull box 254mm . L x 254 mm. W. x 152 mm. H.	7	Pcs.		
5	Miscellaneous (couplings, bolt, clamp, cement, GI Wires, etc.)	1	lot		
6	Others (Chipping, Restoration and masonry works- SSS San Jose N.E.)	50	meters		
				TOTAL	
NO.	Others	QUANTITY	UNIT	COST/UNIT	TOTAL COST
1	Labor Cost	1	lot		
2	Mark up Cost	1	lot		
	Labor and Mark-up	1	lot		
1	Mobilization	1	lot		
2	Others (Freight, Accommodations... etc.)	1	lot		
3	VAT	1	lot		
				TOTAL	
GRAND TOTAL					


Prepared By (Name & Signature) : _____
Name of Company/Bidder : _____

Legend:

- Network /Data Cabinet

2 in. diameter Conduit

☒ Pull box 254mm x L x 294 mm. W. x 152 mm. H.

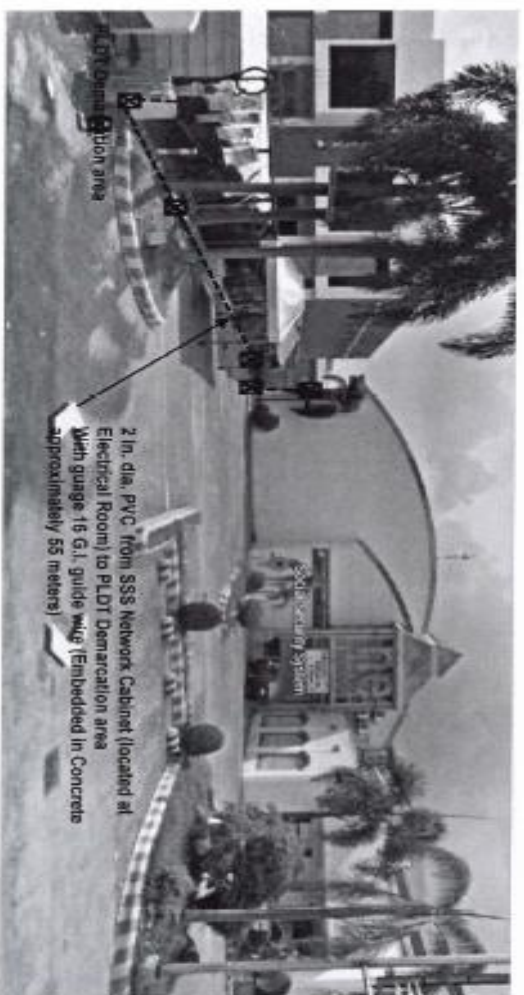

2 in. dia. PVC from SSS Network Cabinet (located at Electrical Room) to PLDT Demarcation area with gauge 16 G. guide wdg Embedded in Concrete approximately 55 meters

SSS SAN JOSE N.E. BRANCH

○ MPLS Roughing – Ins/ Entrance Facility for SSS San Jose N.E.